



PRODUCT ADVANTAGES

- COMPACT under counter glass washer
- LOW VOLUME (8litre) single sheet deep drawn wash tank - no welds
- EFFICIENT & GUARANTEED - 2 litres / cycle water consumption - rinse pump included to guarantee rinse volume, pressure and sanitation results
- Electronic control with digital temperature read-out
- 3 CYCLES: 60 / 90 / 180 secs - Nominal capacity up to 60 racks/h
- HEAT AND NOISE INSULATED - double walled construction
- Insulated smooth opening counter balanced door
- Removable tank strainer, coarse filter and pump suction casing to maximise wash results and reliability
- Optional free-standing reverse osmosis (RO-IV / RO-S) system for polish free washing
- Integrated SELF CLEANING on drain out
- Top and bottom rotating wash and rinse arms
- ACCEPTS 432 x 356mm (17x14") RACKS—stainless steel grid insert to accept other racks see optional equipment
- Ready to install - equipped with: fill/drain hoses, electrical cable & plug(15amp 240V), detergent & rinse aid dispensers, rinse pump, drain pump, back flow preventer (Watermark approved)
- Supplied with 1 off 396 x 396mm 4 sloped row glass rack
- WATERMARK approved
- 240 / 50 / 1 - 15amp
- MADE IN GERMANY

TECHNICAL DATA

Cycle times*	1. 60sec. 2. 90sec 3. 180 sec.
Water consumption	2 l/cycle
Tank capacity	8 litres
Tank heating	0.8 kW
Power supply	240 / 50 / 1
Booster loading Standard	2.1 kW (Interlocked)
Total loading Standard	2.8 kW 15 A
Wash pump	0.6 kW
Rack size	432 x 356 mm (17 x 14")
Loading height	315 mm
Noise level	62 dB (A)
Weight (gross / net)	64 / 58 kg

*Supplied with 150mm adjustable legs


* Thermostop guarantees required temperatures with cold water and / or 240 V connection, the actual cycle times extend accordingly.

For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water softener of the product line HYDROLINE PROTECT.

DIMENSIONAL DRAWING

CONNECTIONS

① Drain hose	2,000 mm ID20/OD25
RO-IV / RO-S	Independent gravity waste to tundish
② Supply hose	2,000 mm R 3/4"
Flow pressure	0.5 (0.8 with softener)- 6 bar
Max. supply water temperature	60°C 35°C with RO
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm

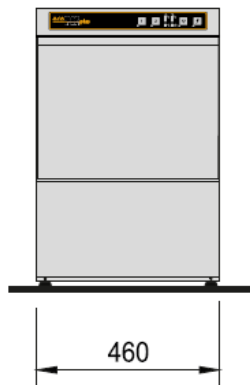

* Plus 150mm adjustable legs

